
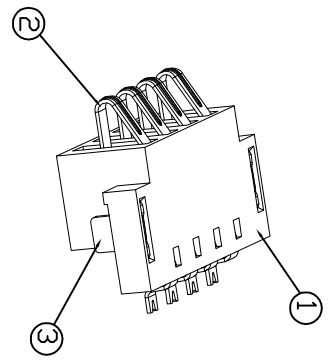


RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05



- NOTES:
- ELECTRICAL PERFORMANCES:
    - 1-1. RATING CURRENT: 2A
    - 1-2. RATING VOLTAGE: 100VAC
    - 1-3. CONTACT RESISTANCE: 50 $\mu\Omega$
    - 1-4. INSULATION RESISTANCE: 1000 $\Omega$ M
    - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MINUTE
  - MECHANICAL PERFORMANCE:
    - 2-1. DURABILITY: 5000TIMES
    - 2-2. NORMAL FORCE AT WORKING POSITION: 80gf Min.
    - 2-3. OPERATION TEMPERATURE: -40° C ~ +85° C.

ITEM	DESCRIPTION	QUANTITY	MATERIAL	FINISH	REMARK
③	PAD 1	2	STAINLESS STEEL	Ni PLATING OVER ALL IN FLATING OVER ALL	
②	CONTACT	4	COPPER ALLOY	AU PLATING OVER Ni AT CONTACT AREA IN FLATING OVER Ni AT SOLDER AREA	
①	HOUSING	1	TERMOPLASTIC UL94V-0 COLOR:BLACK		

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE:	
X. ±5°	0.X±0.25	CBA2504380001		BATTERY 4P 2.5MM H=3.8MM 沉板式	
X. 1±2°	0.XX±0.2	APPD:		DWG NO. BATTERY	
XX. ±1°	0.XXX±0.1	CHKD: Skilla		SCALE SHEET REV	
		DR: Kitty		1:1 1 OF 1 A	