
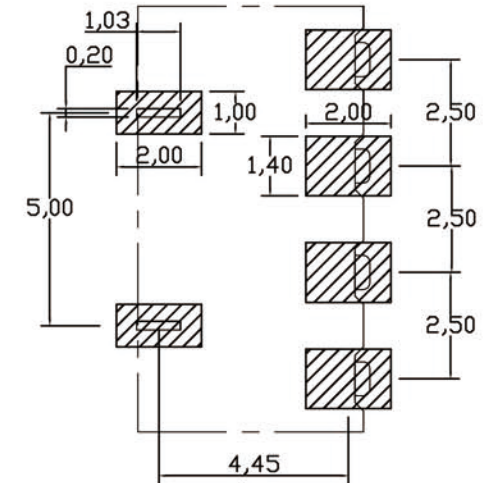
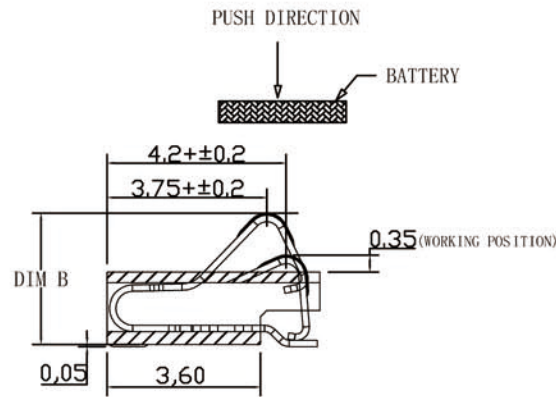


**SPECIFICATIONS:**


1. CURRENT RATING: 2.0A 12V AC/DC.
2. CONTACT RESISTANCE: 60m MAX AT DC 20mA.
3. INSULATION RESISTANCE: 100M MIN AT 500V DC.
4. OPERATING TEMPERATURE RANGE: -25°C TO +85°C.
5. MARKED " " ARE IMPORTANT DIMENSIONS.

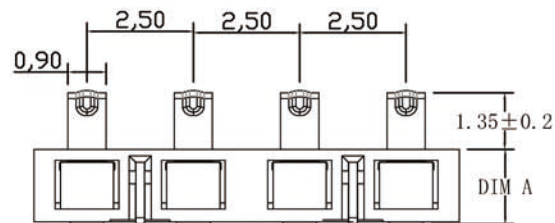

RECOMMENDED PCB LAYOUT

TOP VIEW (. XX ± 0.05)

PART NO.	DIM A	DIM B
CBA25045017001	1.7	3.05 ± 0.2
CBA25045020001	2.0	3.35 ± 0.2

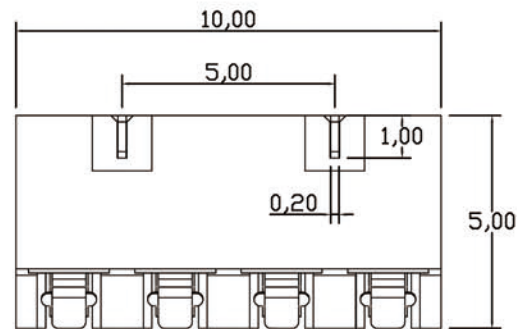

UNITS: mm		<b>CSCONN</b>	CSCONN PRECISE ELECTRONICS CO.,LTD				
GENERAL TOLERANCE			PART NO.(INTENDED USE)		TITLE:		
X. ° ± 5°	0. X ± 0.3	CBA250450XX001		BATTERY 4P 2.5MM H=XMM (1.7-2.0)			
X. 1 ± 2°	0. XX ± 0.2	APPD:		DWG NO. BATTERY			
XX. ± 1°	0. XXX ± 0.1	CHKD: Skila			SCALE	SHEET	REV
XXX. ± 0.5°		DR: Kitty			1:1	1 OF 1	A