








NOTES:
MATERIAL:
HOUSING: THERMO-PLASTIC. UL 94V-0 NATURE.
CONTACT: PHOSPHOR BRONZE.
CAP: BRASS

SPECIFICATION:


CURRENT RATING: 0.5A 30V AC/DC.
CONTACT RESISTANCE: 50mΩ MAX.
INSULATION RESISTANCE: 500MΩ MIN AT 500V DC.
OPERATING TEMPERATURE RANGE: -25°C TO +85°C

PART NO. DESCRIPTION:

CBT-0812XF-XX

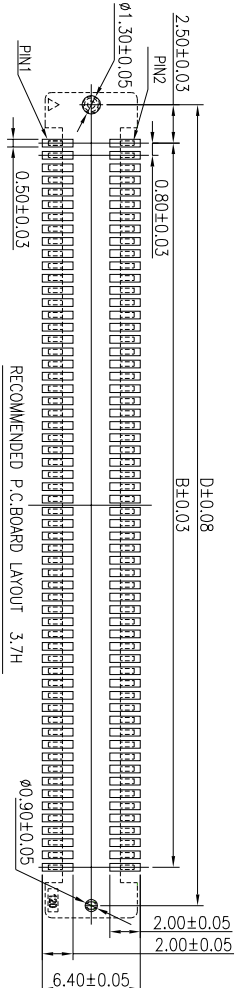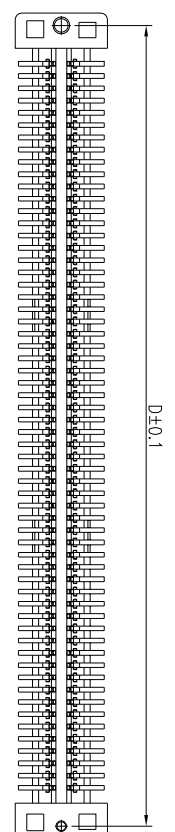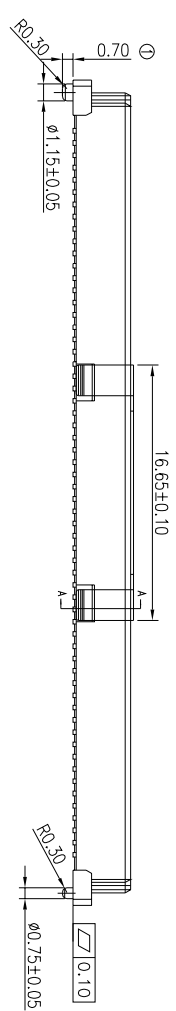

No. of contacts	MATED HEIGHT					
	A	B	C	D	E	F
40	21.80	15.20	17.60	20.20	18.80	20.15
50	25.80	19.20	21.60	24.20	22.80	24.15
60	29.80	23.20	25.60	28.20	26.80	28.15
80	37.80	31.20	33.60	36.20	34.80	36.15
100	45.80	39.20	41.60	44.20	42.80	44.15
120	53.80	47.20	49.60	52.20	50.80	52.15
140	61.80	55.20	57.60	60.20	58.80	60.15
160	69.80	63.20	65.60	68.20	66.80	68.15
180	77.80	71.20	73.60	76.20	74.80	76.15
200	85.80	79.20	81.60	84.20	82.80	84.15

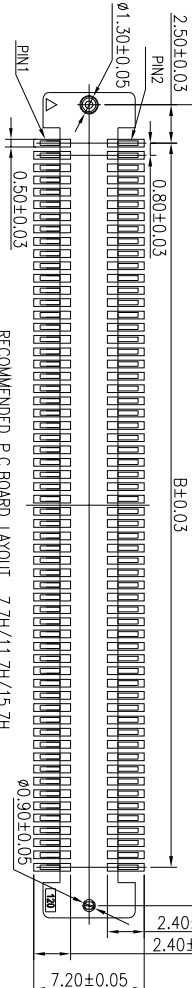

UNITS: mm

GENERAL TOLERANCE	UNITS
X. ±0.25	X. ±0.25
X. ±0.2	X. ±0.2
XX ±1°	0. XX±0.1

CSCONN

PART NO. (INTENDED USE)
CBT-0812XF-XX

APPD: SK11a

CHKD: Sk11a

DR: Kititty

TITLE: BTB 0.8MM XP FEMALE H=XXMM

DWG NO. BTB

SCALE: 1:1

SHEET: 1 OF 1

REV: A

CSCONN PRECISE ELECTRONICS CO., LTD

