


PIN COUNT	DIMENSIONS			
	A	B	C	D
6	6.50	2.50	5.10	3.60
8	7.50	3.50	6.10	4.60
10	8.50	4.50	7.10	5.60
12	9.50	5.50	8.10	6.60
14	10.50	6.50	9.10	7.60
16	11.50	7.50	10.10	8.60
18	12.50	8.50	11.10	9.60
20	13.50	9.50	12.10	10.60
22	14.50	10.50	13.10	11.60
24	15.50	11.50	14.10	12.60
26	16.50	12.50	15.10	13.60
28	17.50	13.50	16.10	14.60
30	18.50	14.50	17.10	15.60
32	19.50	15.50	18.10	16.60
40	23.50	19.50	22.10	20.60
45	26.00	22.00	24.60	23.10
50	28.50	24.50	27.10	25.60
54	30.50	26.50	29.10	27.60
60	33.50	29.50	32.10	30.60

RECOMMENDED PCB LAYOUT

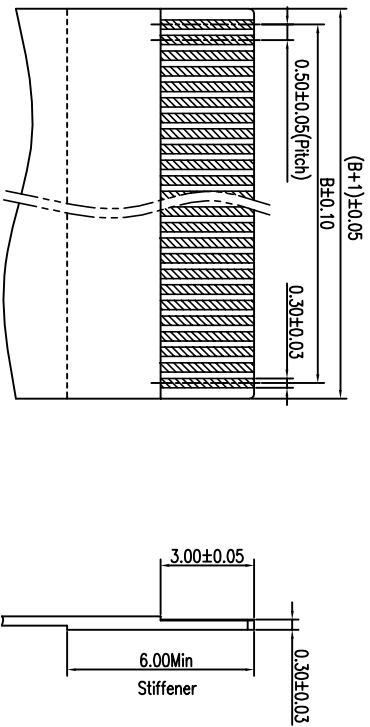

RECOMMENDED FPC/FPC DIM.

- SPECIFICATIONS :
- 1.RATED VOLTAGE: 50VAC OR DC
 - 2.RATED CURRENT: 0.5A
 - 3.CONTACT RESISTANCE: 30mΩ
 - 4.INSULATION RESISTANCE: 50MΩ
 - 5.VOLTAGE RESISTANCE:
AC 250V FOR 1 MINUTE
-40°~ +85°
 - 6.TEMPERATURE: -40°~ +85°

- NOTES:
- 1.HOUSING MATERIAL:ICP E473(UL 94V-0) NATURE
 - 2.COVER MATERIAL:ICP E130(UL 94V-0) BLACK
 - 3.TERMINAL MATERIAL: COPPER ALLOY
 - 4.STATOR MATERIAL: COPPER ALLOY
 - 5.PLATING:

TERMINAL: OVERALL SURFACE PLATED WITH GOLD FLASH:0.8u"~1.2u"
 OVERALL UNDER PLATED WITH NICKEL:30u"~100u"
 STATOR: OVERALL SURFACE PLATED WITH MATE: 11u"~100u"~160u"
 OVERALL UNDER PLATED WITH NICKEL:30u"~100u"

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:	
X. ±5°	0.X±0.25	CFP052049XX004		FPC 0.5MM XP H=2.0MM 前插后掀	
X.1±2°	0.XX±0.2	APPD:		DWG NO.	
XX. ±1°	0.XXX±0.1	CHKD: SK11a		FPC	
		DR: Kitty		SCALE	
				SHEET	
				1 OF 1	
				REV	
				A	



1 2 3 4 5 6 7 8

A B C D E