


SECTION A-A (S=2/1)

SPECIFICATION

- Material:
Housing: HIGH-TEMP Plastic, UL94V-0, color: Natural.
Lock: HIGH-TEMP Plastic, UL94V-0, color: black.
Contacts: Copper alloy.
Solder tab: Copper alloy.
- Electrical Characteristics:
Current rating: 0.5A(max).
Voltage rating: 50V(max).
Operating Temperature: -25°C~+85°C.
Insulation resistance: 500M ohms min. at 500V DC
Dielectric withstanding voltage: 500V AC/minute.
Contact resistance: 30m ohms max.

	A	B	C	Pin#	A	B	C
2	1	3.1	7.4	18	17	19.1	23.4
3	2	4.1	8.4	19	18	20.1	24.4
4	3	5.1	9.4	20	19	21.1	25.4
5	4	6.1	10.4	21	20	22.1	26.4
6	5	7.1	11.4	22	21	23.1	27.4
7	6	8.1	12.4	23	22	24.1	28.4
8	7	9.1	13.4	24	23	25.1	29.4
9	8	10.1	14.4	25	24	26.1	30.4
10	9	11.1	15.4	26	25	27.1	31.4
11	10	12.1	16.4	27	26	28.1	32.4
12	11	13.1	17.4	28	27	29.1	33.4
13	12	14.1	18.4	29	28	30.1	34.4
14	13	15.1	19.4	30	29	31.1	35.4
15	14	16.1	20.4	32	31	33.06	37.4
16	15	17.1	21.4	39	38	40.06	44.4
17	16	18.1	22.4				

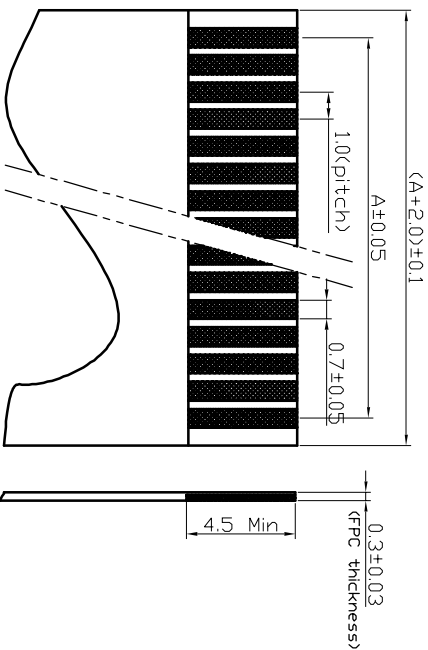


APPLICABLE FPC

CSCONN

CSCONN PRECISE ELECTRONICS CO.,LTD

UNITS: mm	
GENERAL TOLERANCE	PART NO. (INTENDED USE)
X. ° ±5° 0.X ±0.25	CFP1020XX01003
X.1 ±2° 0.XX ±0.2	APPD:
XX. ±1° 0.XXX ±0.1	CHKD: Skilla
	DR: Kitty

TITLE: FPC 1.0MM XP H=2.0MM 掀盖式	DWG NO. FPC
---------------------------------	-------------



SCALE 1:1 SHEET 1 OF 1 REV A