

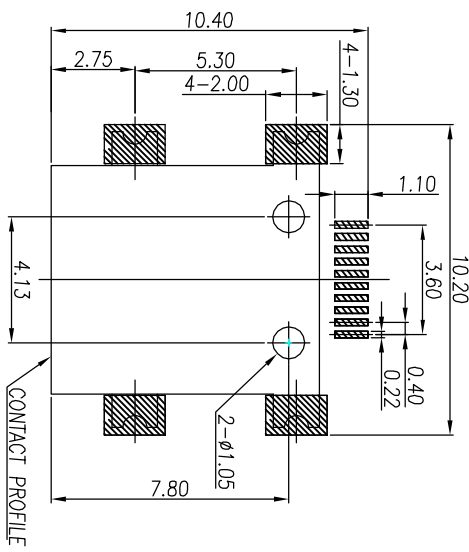
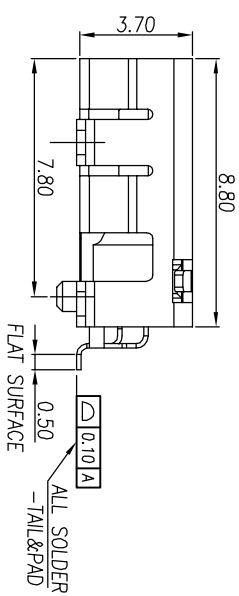


3D VIEW

- NOTE:
1. ELECTRICAL CHARACTERISTICS
  - 1-1. CONTACT RESISTANCE: 80mΩ MAX.
  - 1-2. INSULATION RESISTANCE: 1000MΩ MIN.
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN FOR 1 MINUTE.
  - 1-4. DURABILITY: 5000 CYCLES
  - 1-5. INSERTION FORCE: 35N Max.
  - 1-6. EXTRACTION FORCE: 10N Min.

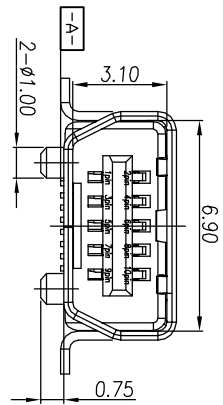

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

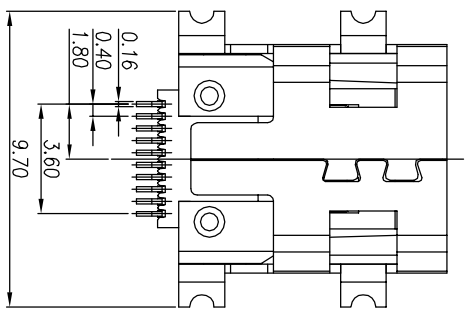

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE:	
X. ±5°	0.X±0.3	CMU04108802001		MINI USB 10P FEMALE SMT AB TYPE	
X.1±2°	0.XX±0.2	APPD:		DWG NO. MINI USB	
XX. ±1°	0.XXX±0.1	CHKD: Skilla		SCALE SHEET	
XXX. ±0.5°		DR: Kitty		1:1 1 OF 1 REV	

