


PCB LAYOUT

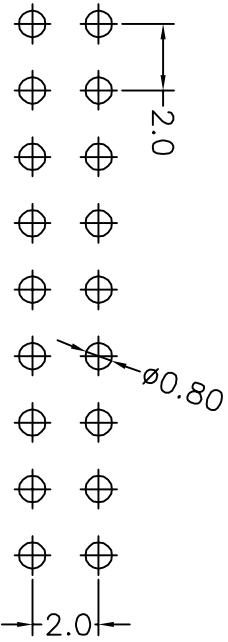

### SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature:  $-40^{\circ}C$  to  $+105^{\circ}C$   
 Contact Resistance :  $20m\Omega$  Max.  
 Insulation Resistance:  $1000M\Omega$  Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard : PBT or PA6T  
 Contact Material : Brass  
 Contact plating : Au or Sn over  $50u''$  Ni

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:	
X. $\pm 5^{\circ}$	0.X $\pm 0.25$	CPH202087XX001		PH 2.0*2.0MM XP DIP180 H=8.7MM	
X. $1 \pm 2^{\circ}$	0.XX $\pm 0.2$	APPD:		DWG NO. PH	
XX. $\pm 1^{\circ}$	0.XXX $\pm 0.1$	CHKD: Skilla		SCALE SHEET REV	
		DR: Kitty		1:1 1 OF 1 A	