



- SPECIFICATION**
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V) ;
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.

P.C.B LAYOUT
TOP VIEW

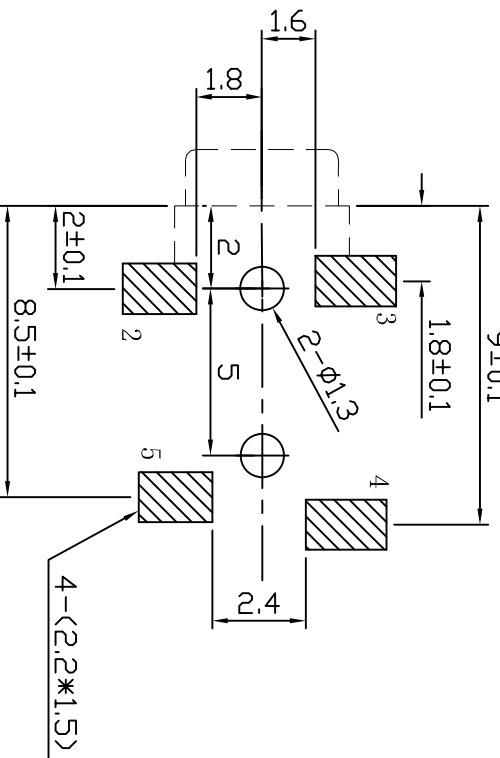

SCHEMATIC



UNITS: mm		CSCONN		SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE: PHONE JACK	
X. ° ±5°	0.X ±0.3	CPJ-235		DWG NO. JACK	
X. 1 ±2°	0.XX ±0.2	APPD:	SK11a	SCALE	SHEET
XX. ±1°	0.XXX ±0.1	CHKD:	Kitty	1:1	1 OF 1
XXX. ±0.5°		DR:			REV
					A