
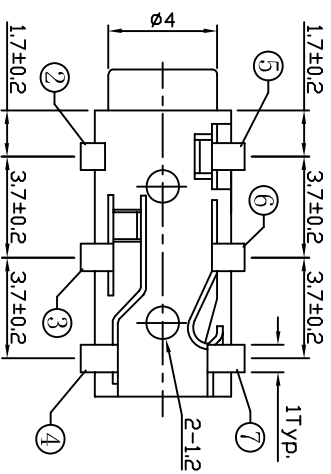


P. C. B LAYOUT
TOP VIEW

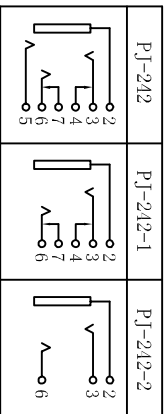

- SPECIFICATION**
1. Rating : DC 12V 1.0A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V) ;
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 300-3000grams;
 6. life test: 5,000 cycles.

7	CURVE PIECE	1	BRONZE T=0.2	Au (0.2 Micron)
6	SPRING	1	Be-Cu T=0.2	Au (0.2 Micron)
5	CONTACT FOOT	1	SUS301 T=0.2	Au (0.2 Micron)
4	CURVE PIECE	1	BRONZE T=0.2	Au (0.2 Micron)
3	SPRING	1	Be-Cu T=0.2	Au (0.2 Micron)
2	CONTACT FOOT	1	SUS301 T=0.2	Au (0.2 Micron)
1	HOUSING	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNITS: mm

GENERAL TOLERANCE

X.° ±5° 0.X±0.3

X.1±2° 0.XX±0.2

XX ±1° 0.XXX±0.1

XXX ±0.5°

CSCONN

PART NO. (INTENDED USE)

CPJ-242

APPD: SK11a

CHKD: SK11a

DR: Kitty

SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD

TITLE: PHONE JACK

DWG NO. JACK



SCALE SHEET REV

1:1 1 OF 1 A

E

D

C

B

A

1 2 3 4 5 6 7 8