



P. C. B LAYOUT  
TOP VIEW

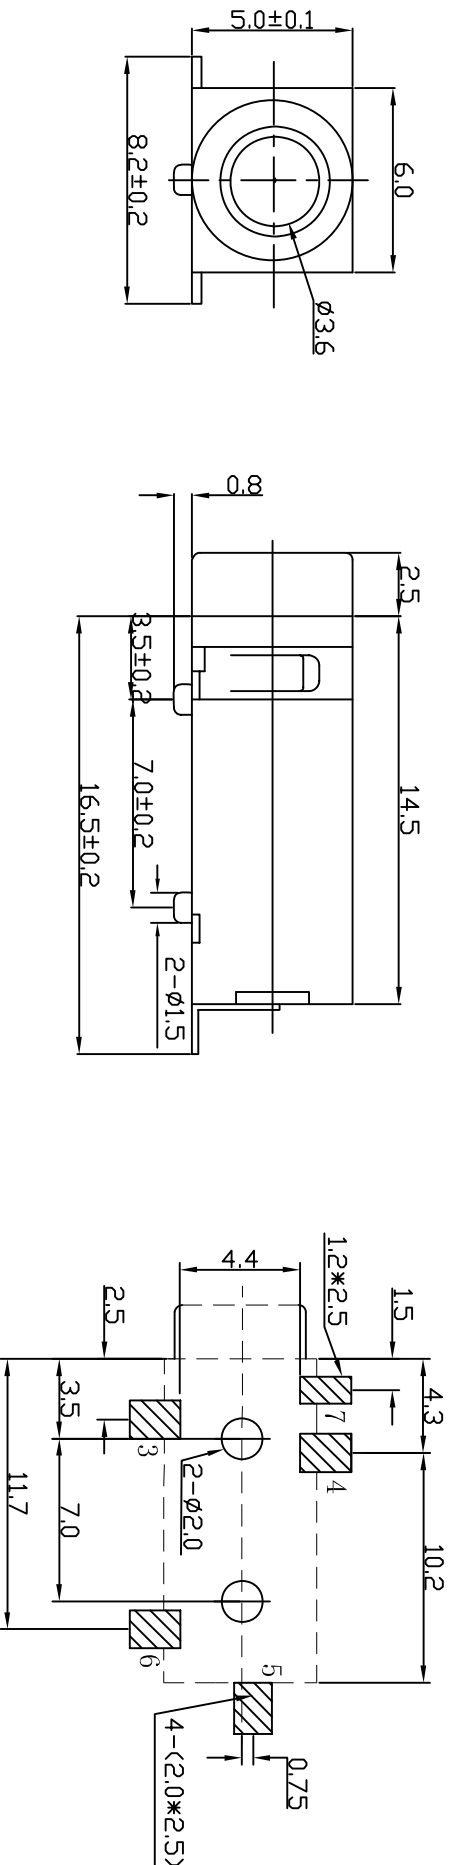

SCHEMATIC

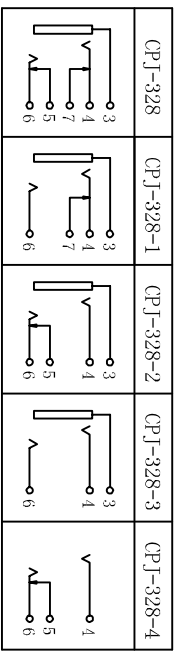

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V) ;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	CURVE PIECE	1	BRASS	Ag-Plating
6	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
5	CURVE PIECE	1	BRASS	Ag-Plating
4	2#CONTACT FOOT	1	SUS301	Ag-Plating
3	1#CONTACT FOOT	1	SUS301	Ag-Plating
2	COVER	1	PA46	
1	HOUSING	1	PA46	

UNITS: mm		<b>CSCONN</b> PART NO.(INTENDED USE) CPJ-328		TITLE: PHONE JACK DWG NO. JACK	
GENERAL TOLERANCE					
X. ° ±5°	0. X±0.3				
X. 1±2°	0. XX±0.2	APPD:			
XX. ±1°	0. XXX±0.1	CHKD: Skilla			
XXX. ±0.5°		DR: Kitty			
SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD					

SCALE	1:1	SHEET	1 OF 1	REV	A
-------	-----	-------	--------	-----	---