
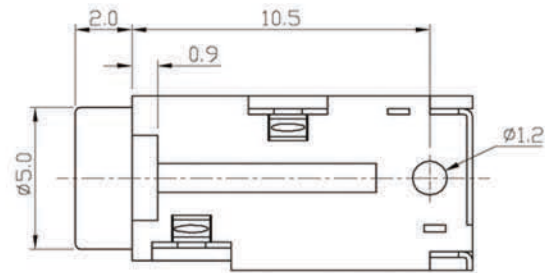


**SCHEMATIC**



**SPECIFICATION**

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03 \Omega$ ;
3. Insulation resistance:  $\geq 100M \Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PBT	
4	4# CONTACT FOOT	1	BRASS	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

UNITS:		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD		
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE: PHONE JACK		
X. ° ±5°	0. X±0.25	CPJ351102		DWG NO. JACK		
X. 1±2°	0. XX±0.2	APPD:		SCALE		
XX. ±1°	0. XXX±0.1	CHKD: Skila		SHEET		
		DR: Kitty		REV		
				1:1		
				1 OF 1		
				A		

