

1 2 3 4 5 6 7 8

A

B

C

D

E



A

B

C





D

E

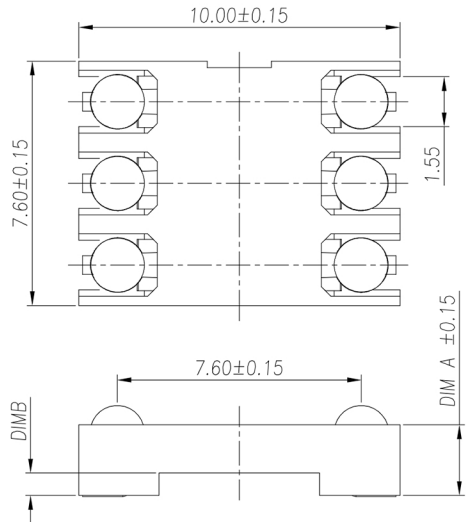

NOTES:

- 1) MATERIAL:
1-1 HOUSING:THERMOPLASTIC,UL 94V-0,COLOR:BLACK
1-2 CONTACT:COPPER ALLOY, T=0.15mm
- 2) FINISH:
2-1 CONTACT:GOLD PLATING ON CONTACT AREA(SEE P/N DESCRIPTION)
1u" MIN Au PLATING ON SOLDERTAILS
50u" MIN NICKEL UNDERPLATING OVER ALL
- 3) PRODUCT SPECIFICATIONS:
3-1 VOLTAGE RATING: 50V
3-2 CURRENT RATING: 1.0A
3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN
3-4 CONTACT RESISTANCE: 50 MILL.OHM MAX
3-5 OPERATION TEMPERATURE: -20° TO +85°
3-6 DURABILITY: 3000 CYCLES

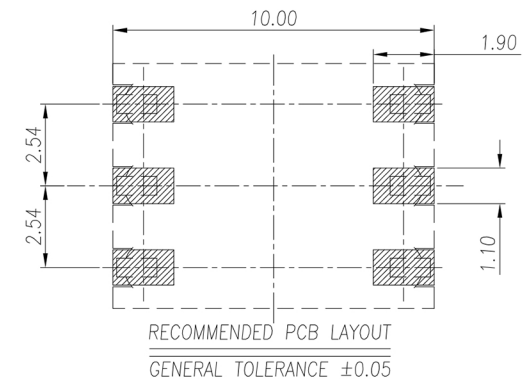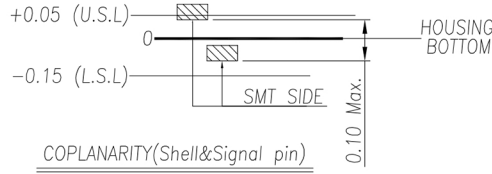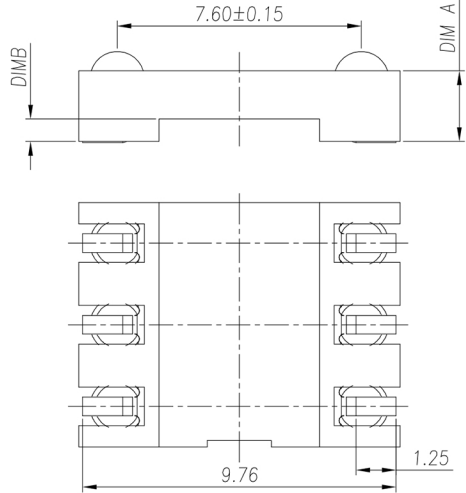

NOTICE:

CSI06107625001	2.50	1.00
CSI06107622001	2.20	0.70
CSI06107618001	1.80	0.30
CSI06107615001	1.50	0.00
P/N	DIM A	DIM B

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD			
GENERAL TOLERANCE		PART NO.(INTENDED USE) CSI061076XX001		TITLE: SIM CARD 6P H=XMM 简易式			
X. ° ±5°	0. X±0.25	APPD:		DWG NO. SIM CARD			
X. 1±2°	0. XX±0.2	CHKD: Skila			SCALE	SHEET	REV
XX. ±1°	0. XXX±0.1	DR: Kitty			1:1	1 OF 1	A

1 2 3 4 5 6 7 8