



- NOTES:
1. MATERIAL:SEE TABLE
 2. SPECIALITY:
 - 2.1 Rated current: 0.5A Max
 - 2.2 Rated voltage: 30V AC
 - 2.3 Contact Resistance:100mohm MAX
 - 2.4 Insulation Resistance:1000Mohm MIN 500V DC
 - 2.5 Dielectric withstanding voltage: 500V AC/minute.
 - 2.6 Solder ability:250±5°C 10±0.5s.



PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved




NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS
8	HOOK	1	STAINLESS STEEL		
7	SPRING	1	STAINLESS STEEL		
6	SLIDE	1	GLASS FILLED PA10T		
5	DETECTION SWITCH	1	COPPER ALLOY	Au OVER Ni (TABLE 2)	
4	GND FRAME	1	COPPER ALLOY	Au OVER Ni (TABLE 2)	
3	SHELL	1	STAINLESS STEEL	Au OVER Ni (TABLE 2)	
2	HOUSING	1	GLASS FILLED LCP		
1	CONTACT	6	COPPER ALLOY	Au OVER Ni (TABLE 2)	

UNITS:	mm
GENERAL TOLERANCE	
X. ± 0.25	
X. ± 0.2	
X. ± 0.1	
X. ± 0.1	


CSCONN	CSCONN PRECISE ELECTRONICS CO.,LTD
PART NO. (INTENDED USE)	CS106121412003
APPD:	
CHKD:	SK11a
DR:	Kitty

TITLE:	NANO SIM CARD PUSH 1.25H
DWG NO.	SIM CARD

SCALE	1:1
SHEET	1 OF 1
REV	A

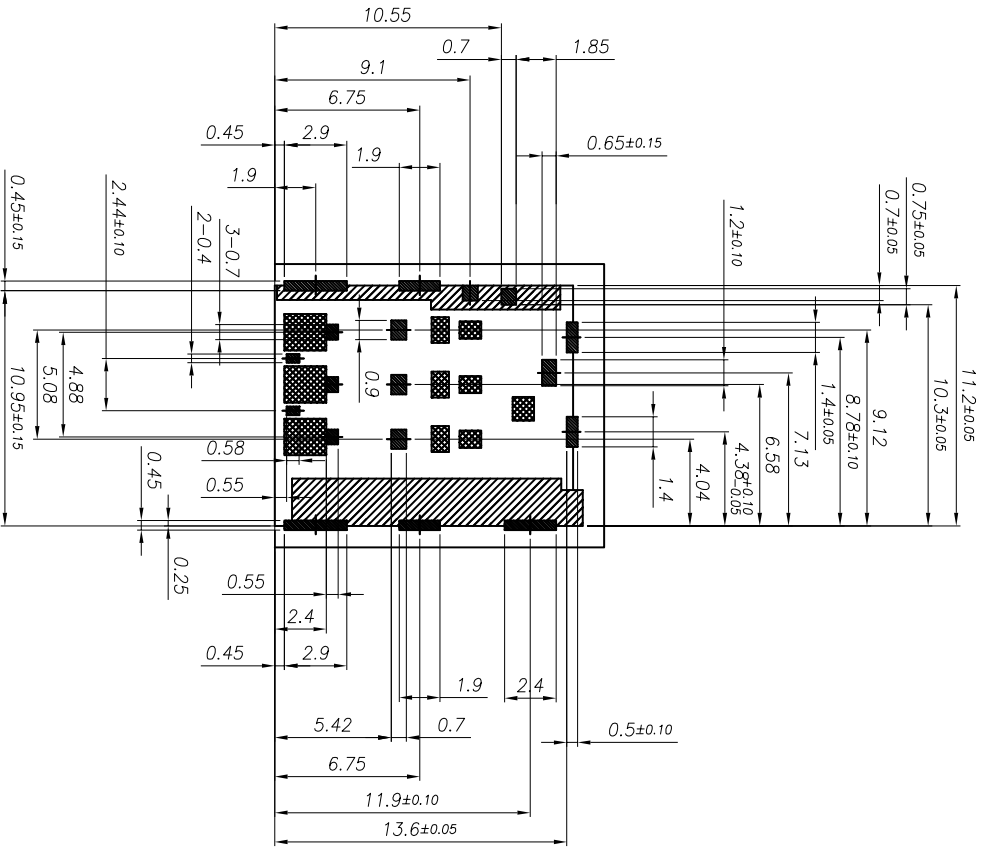

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)
 RECOMMENDED MANTL MASK T=0.12MM

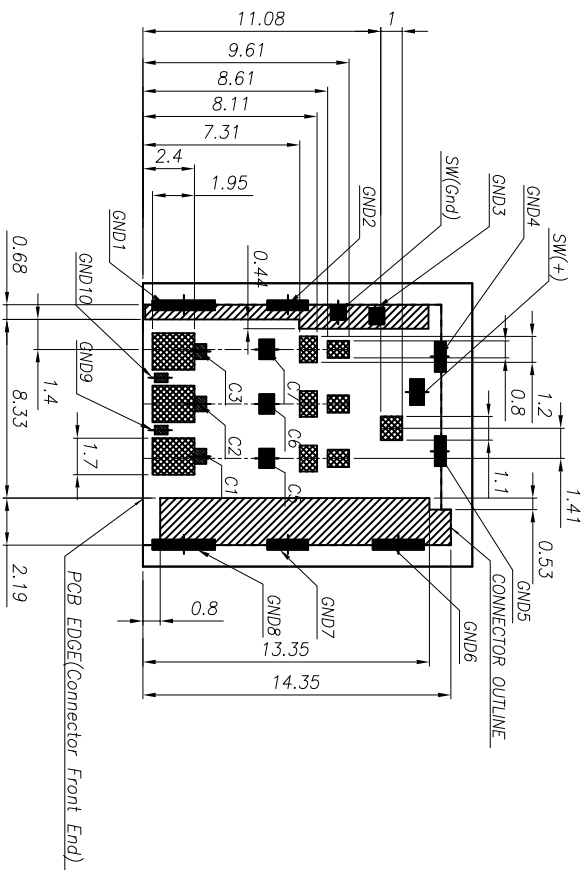

THIS AREA SHOULD BE FREE OF
 ANY CONDUCTIVE TRACES
 SMT SOLDER AREA
 OPEN WIRE RESTRICTED AREA
 (POTENTIAL TOUCH OF COMPONENTS ON PCB)

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD			
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE: NANO SIM CARD PUSH 1.25H			
X ° ±5°	0.X±0.25	CS106121412003		DWG NO. SIM CARD			
X.1±2°	0.XX±0.2	APPD:		SCALE SHEET REV			
X.X ±1°	0.XXX±0.1	CHKD: Skilla		1:1 1 OF 1 A			
		DR: Kitty					

