


RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE±0.05

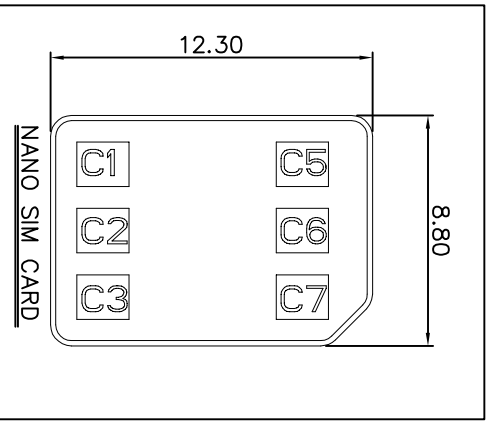

- NOTES:
- MATERIAL:
    - Housing: LCP ,Black UL94V-0
    - Terminid:C5210,T=0.10mm
    - Gold Flash on contact area,
    - 100u"Tin Plated on Solder area
    - Shell: SUS304 T=0.10mm
    - Nickel Plating 50u"Min
    - Halogen Free and Rohs compliant product
  - Electrical
    - Rated Current:1.0 A
    - Rated Voltage:15V
    - Ambient Temperature Range:-25°C~+85°C
    - Ambient Humidity Range :95% R.H. Max.
    - Contact Resistance:100mΩ Max
    - Insulation Resistance:500MΩ Min
    - Dielectric Withstanding Voltage:500V AC For one minute
    - Durability:1500 cycles
    - Temperature 260±5°C,

|                   |            |                        |  |                                    |  |
|-------------------|------------|------------------------|--|------------------------------------|--|
| UNITS: mm         |            | <b>CSCONN</b>          |  | CSCONN PRECISE ELECTRONICS CO.,LTD |  |
| GENERAL TOLERANCE |            | PART NO.(INTENDED USE) |  | TITLE:                             |  |
| X. ±5°            | 0. X±0.25  | CS1069412512001        |  | NANO SIM CARD H=1.2MM              |  |
| X.1±2°            | 0. XX±0.2  | APPD:                  |  | DWG NO.                            |  |
| XX. ±1°           | 0. XXX±0.1 | CHKD: Skilla           |  | STM CARD                           |  |
|                   |            | DR: Kitty              |  | SCALE SHEET REV                    |  |
|                   |            |                        |  | 1:1 1 OF 1 A                       |  |