


- NOTES:
- MATERIAL:
 - Housing: High Temperature Thermoplastic
 - Terminal: Copper Alloy.
 - Shell: Stainless Steel
 - FINISH:
 - Terminal: Plated Gold on the Contact Area and Solder Tails, Underplated Nickel Over all.
 - Shell: Plated Gold on the Solder Tails, Underplated Nickel Over all.
 - SPECIALTY:
 - Rated current: 0.5A
 - Rated voltage: 30V
 - Contact Resistance: 50mΩ MAX
 - Insulation Resistance: 100MΩ MIN 100V DC
 - Dielectric withstanding voltage: 100V AC.
 - Solder ability: 235±5°C, 5±0.5s.
 - Durability: 5000 Cycles Min.

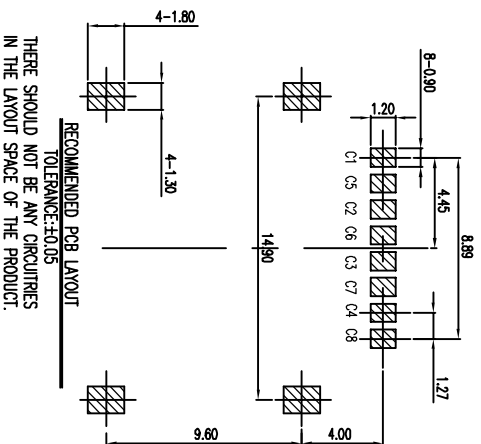

PIN No	DESCRIPTION
C1	VCC : SUPPLY VOLTAGE
C2	RST : RESET SIGNAL
C3	CLK : CLOCK SIGNAL
C4	RESERVED
C5	GND
C6	VPP : VARIABLE SUPPLY VOLTAGE
C7	I/O : SERIAL DATA INPUT/OUTPUT
C8	RESERVED

UNITS: mm		CSCONN		TITLE: CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		DWG NO. SIM CARD	
±.45°	0.1±0.25	CS108151601001		MICRO SIM CARD 8P 1.5H 掀盖式	
±.12°	0.1±0.2	APPD:		SCALE 1:1	
±.1°	0.1±0.1	CHKD: Skila		SHEET 1 OF 1	
		DR: Kitty		REV A	

E

D

C

B

A

D

C

B

A