


- NOTE:
- Material:
Housing: Thermoplastics, UL94V-0 (ROHS, HF)
Contact: Phosphor Bronze C5191-EH/C2880-EH, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
 - FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area,
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min. Nickel Underplating Over All.
 - Specification:
3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
3.2: Electrical:
Insulation Resistance (EIA-364-21):
1000MΩ Min. at 500V/DC for 1Minute.
Contact Resistance (EIA-364-22):
30 mΩ Max. at 20mV Max. 50mA
Dielectric Withstanding Voltage (EIA-364-20):
No discharge, Flashover or breakdown at 500V/AC 1minute
4. Plug extraction force shall be between 1.0kgf and 2.00kgf

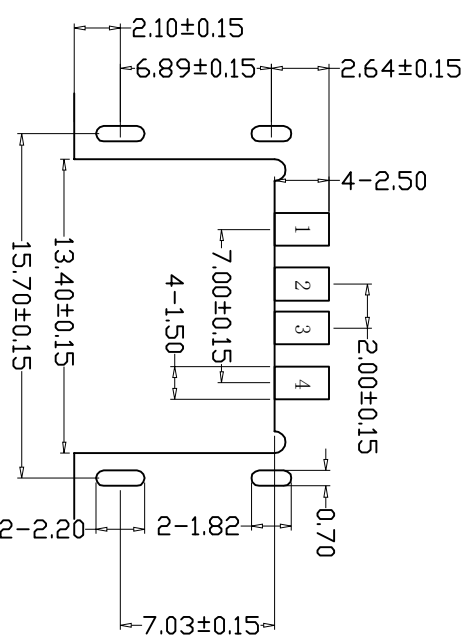

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

UNITS: mm	CSCONN		CSCONN PRECISE ELECTRONICS CO., LTD	
GENERAL TOLERANCE	PART NO. (INTENDED USE)	TITLE:	USB 4P FEMALE 短体沉板式	
X.° ±5°	CUS04102103001	DWG NO.	USB	
X.1 ±2°	APPD:	SCALE	SHEET	REV
XX ±1°	CHKD: Skilla	1:1	1 OF 1	A
	DR: Kitty			