


A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

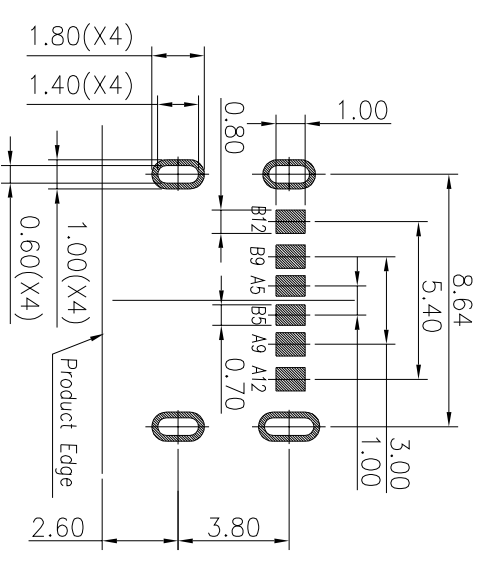

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- NOTES:
SPECIFICATION:
- CURRENT RATING: 5A MAX
 - VOLTAGE: 20V MAX
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 6N~20N
 - DURABILITY: 3,000 CYCLES

UNITS: mm	
GENERAL TOLERANCE	
X. ° ±5°	0.X±0.25
X.1±2°	0.XX±0.2
X.X ±1°	0.XXX±0.1

CSCONN	PART NO.(INTENDED USE) CUS31066889001	CSCONN PRECISE ELECTRONICS CO.,LTD
TITLE:	USB TYPE C FEMALE 6P L=6.8MM	

APPD:	SK11a
CHKD:	Kitty
DR:	Kitty

DWG NO.	USB
SCALE	1:1
SHEET	1 OF 1
REV	A

